


RC 12.13


130X140 – 67 m³/h



RC 12.13


- Axial fans supplied with grille and filter;
- Medium external profile;
- IP44 or IP54 protection degree;
- Quick and functional assembly of the fan on the electrical cabinet through elastic click hooks and gasket pre-installed on the product;
- Maximum operating temperature: +50°C;
- Electrical connection through terminal block;
- Possible installation with screws (provided);
- Ball bearing motor;
- Body made of ABS self-extinguishing material grey RAL 7035;
- Grilles in grey RAL 7032 and 7035, black RAL 9005;
- Easily removable grille to allow quick replacement of the filter;
- Slotted external grilles to allow drainage of condensation;
- In accordance with European Standard EN 60529, EN 60335-2-80.

DRILLING SCHEME FOR FAN ASSEMBLY AND GRILLE





Model	A	B	C	D	øE	F
RC 12.13	117	123	115	125	3	12

DIMENSIONS

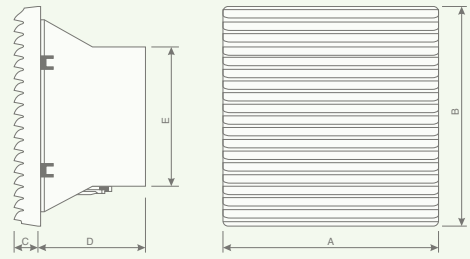

Model	A	B	C	D	øE	Kg
RC 12.13	130	140	24	74	114	0,6

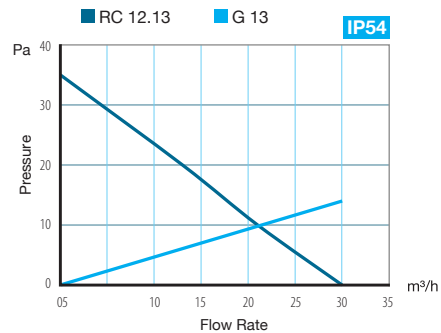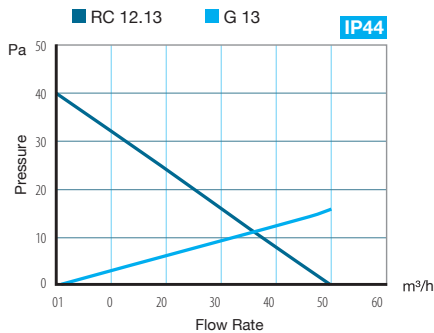

TECHNICAL DATA

Model	Code	IP Grade	Grille Colour	Volt 50/60 Hz	Flow rate m³/h		W	Nom. Curr. in A	dB(A) 3m	Kg
					with filter	without filter				
RC 12.13	0095532	IP44	GREY RAL 7032	220-240	50	67	17	0,11	38	0,6
RC 12.13	0095535	IP44	GREY RAL 7035	220-240	50	67	17	0,11	38	0,6
RC 12.13	0095505	IP44	BLACK RAL 9005	220-240	50	67	17	0,11	38	0,6
RC 12.13	0095932	IP44	GREY RAL 7032	110-120	50	67	17	0,22	38	0,6
RC 12.13	0095935	IP44	GREY RAL 7035	110-120	50	67	17	0,22	38	0,6
RC 12.13	0095905	IP44	BLACK RAL 9005	110-120	50	67	17	0,22	38	0,6
RC 12.13	0090132	IP54	GREY RAL 7032	220-240	30	67	17	0,11	38	0,6
RC 12.13	0090135	IP54	GREY RAL 7035	220-240	30	67	17	0,11	38	0,6
RC 12.13	0090105	IP54	BLACK RAL 9005	220-240	30	67	17	0,11	38	0,6
RC 12.13	0090032	IP54	GREY RAL 7032	110-120	30	67	17	0,22	38	0,6
RC 12.13	0090035	IP54	GREY RAL 7035	110-120	30	67	17	0,22	38	0,6
RC 12.13	0090005	IP54	BLACK RAL 9005	110-120	30	67	17	0,22	38	0,6