
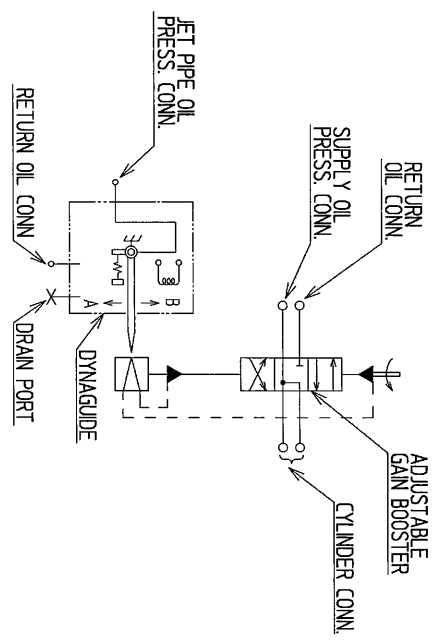


SPECIFICATIONS

JET NOZZLE	: φ1.6
SUPPLY OIL PRESS.	: 15MPa
JET PIPE OIL PRESS.	: 15MPa
ALLOWABLE DRAIN PRESS.	: 0.1MPa
MOMENTARY MAX. OIL PRESS.	: 2.1MPa
GASKET MATERIAL	: VALQUA 6500△
O-RING MATERIAL	: VITON

WHEN INPUT SIGNAL INCREASE, OIL PRESS. COME OUT FOR * PORT (A-A' VIEW) WITH JET PIPE SWING B SIDE.



NO.	DATE	DESCRIPTION	REV.	CKD.
1	1991/02/25	V-6401 → 6500	M.OTSU	M.SANO
2	2007/03/19	REV. (B-2146)	S.HONDO	Y.IMAI

DYNAGUIDE	
DJ230-B010C/Y	
Y: NON-ASBESTOS SEAL	
DWN.	T.SUICHIYA 1991/12/02
CKD.	M.SANO 1991/12/04
APPD.	T.SAITO 1991/12/05
DRG. NO.	BA4085-0-EA
SCALE	1:4
ORDER NO.	