

Timer type 726 016 060




60 minute, 6 horizontal contacts , Hold function
Mounted with two screws 2,9x8

Applications: *Battery chargers, ultrasonic cleaners, saunas, tanning beds, medical equipment, dryers, small appliances, and food service equipment.


Standard Features: * max 16 A (active power) and 3 A (for reactive (inductive) power) – 240 V
* max 10 A (active power) 2 A (for reactive (inductive) power) – 400 V
* ¼ HP 120/250 Vac 60Hz

Certificates: * VDE, ENEC, CSA, UL



MOUNTING FOR TIMER




TYPE OF COVER




TURNING ANGLE



TYPE OF SWITCH

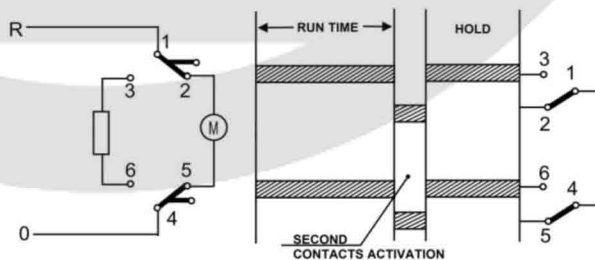

SHAPE OF SHAFT



POSITION "0"

